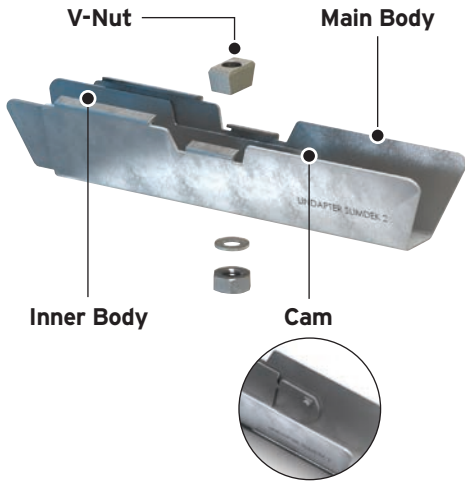


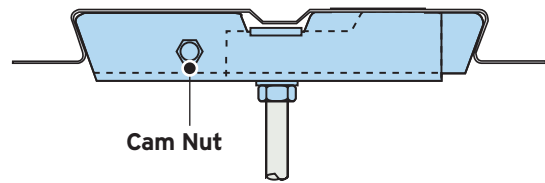
## Type SD2 - Slimdek 2

Designed for the ComFlor® 225 profiles manufactured by Tata Steel® Europe, the Type SD2 offers a fully flexible suspension position.



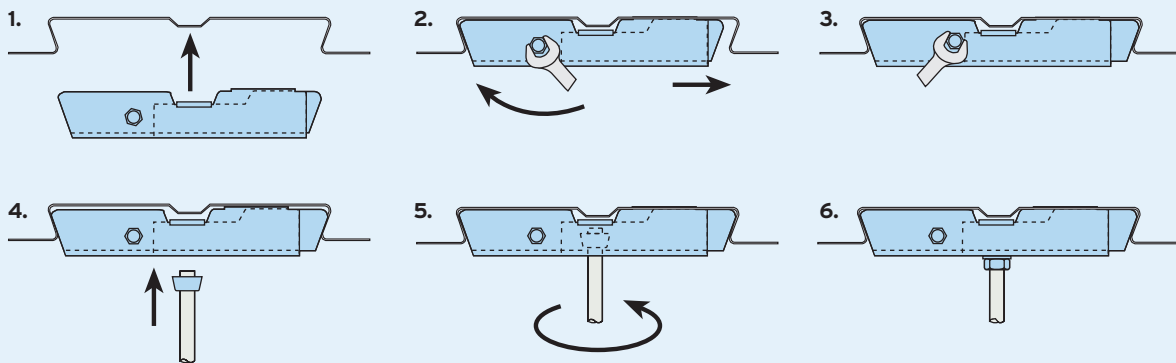
Material: Pre-galvanised strip.

Product Code	Rod min 4.6	Safe Working Load (FOS 3:1) Tensile / 1 Rod kN	Tightening Torque Nm
SD210	M10	1.0	12



### How to install...

 Watch the installation video at [www.Lindapter.com](http://www.Lindapter.com)






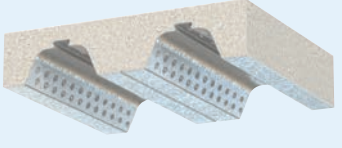
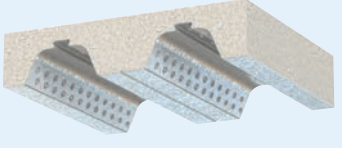


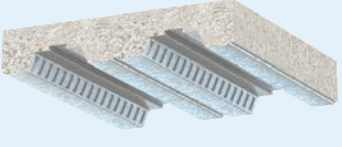

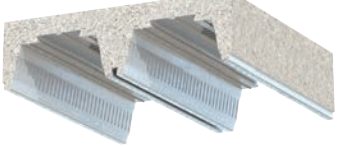
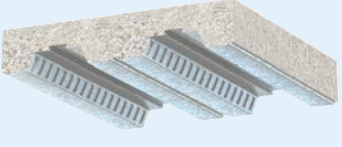
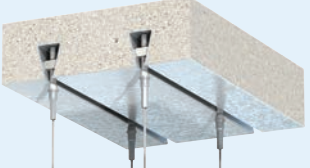

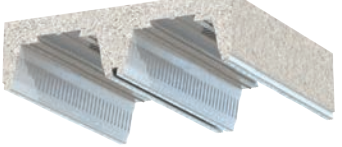


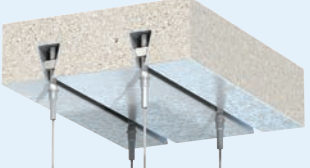
- 1) With Slimdek 2 (SD2) in its retracted position (as supplied) locate the fixing in the re-entrant channel.
- 2) Hold SD2 in position with one hand, then rotate the cam nut in the direction shown above with a spanner.
- 3) Tighten the cam nut until the inner body of the fixing locates against the re-entrant channel.
- 4) Offer the V-Nut on a threaded rod up to the main body.
- 5) Rotate the V-Nut through 90° to allow it to sit at the bottom of the SD2 body.
- 6) Secure the assembly with a nut.

- Install the decking fixings after the concrete has been poured and has reached full strength.
- If the decking profile is deformed or distorted, do not install the fixing. If in doubt, contact the Technical Support team for advice.



## Product Comparison

The table below shows the various components that are designed to fit the decking profiles of major manufacturers such as Composite Metal Flooring (CMF®), Kingspan® Structural Products and Structural Metal Decks (SMD).

### Components

Lindapter Decking Fixing	Compatible Composite Decking Profile(s)
<p><b>Type TR60</b> page 64</p> 	<p><b>Structural Metal Decks (SMD)</b> TR60+ and TR80+</p>  
<p><b>Type MF</b> page 65</p> 	<p><b>Composite Metal Flooring (CMF®)</b> MetFloor® 60 and MetFloor® 80</p>  
<p><b>Type MW2 - Multiwedge 2</b> page 66</p> 	<p><b>Kingspan® Structural Products</b> Multideck® 60 and Multideck® 80</p>  
<p><b>Type AW - Alphawedge</b> page 67</p> 	<p><b>Hare Decking (formerly Richard Lees®)</b> Ribdeck® E60</p>  
<p><b>Type SD2 - Slimdek 2</b> page 68</p> 	<p><b>Tata Steel® Europe</b> ComFlor® 225</p>  
<p><b>Type VN</b> page 69</p> 	<p><b>Fits several profiles including:</b> R51 (SMD), ComFlor® 51 (Tata Steel®), Holorib® (Hare Decking), Superib® (Hare Decking), Multideck® 50 (Kingspan®) and MetFloor® 55 (CMF®)</p> 

### Also available

<p><b>Type TC - Toggle Clamp</b> page 69</p> 	<p><b>Designed for:</b> Service suspension from pre-cast hollow core slabs (minimum core depth of 75mm) as well as Structural Hollow Section (SHS), steel sheeting or purlins.</p> 
--	--